
SPECIFICATION FOR APPROVAL

Product	DYNAMIC SPEAKER
Part No.	AS-4050B08-B15T
Customer Approval	

Approved By	Checked By	Made By



A & B Components

<http://www.speaker-tw.com>

1.CHARACTER DATA

AS-4050B08-B15T

ITEM		SPECIFICATIONS	
01	Type	Dynamic speaker	
02	Dimension	External diameter 40 mm	
03	Rated Input Power	1.0W (Long Time)	
04	Max. Input Power	2.0W (Short Time)	
05	Impedance	8 ohm \pm 15% at 1500Hz.	
06	Resonance Frequency (Fo)	600Hz \pm 20% at Fo, 1V	
07	Sensitivity (S.P.L.)	102dB(1W/0.1m) \pm 3 dB	at AVE 0.8K,1.0K,1.2K,1.5 KHz.
08	Frequency Range	Fo – 20KHz	
09	Total Harmonics Distortion	Max 8 % at 1 KHz,1.0W.	
10	Voice Coil	Diameter 13 mm	
11	Magnet	Rare earth permanent (Nd-Fe-B) magnet Φ 12.5 x 1.5mm	
12	Weight	10g \pm 5%g	
13	Appearance	Should not exist any obstacle to be harmful to normal operation; damages, cracks, rusts and distortions, etc.	
14	Operation Test	Must be normal at program source – 1.0W	
15	Buzz, Rattle, etc.	Should not be audible at 2.83V sine Wave between Fo to 20KHz	
16	Polarity	When positive voltage is applied to the terminal marked (+), diaphragm should move to the front.	
17	Terminal Strength	Capable of withstand 1kg load for 30 seconds without resulting in any damage or rejection.	
18	Temperature	Operating temperature: -20°C to +60°C Storage temperature: -30°C to +70°C	

Test Condition

STANDARD

Temperature : 15 ~ 35°C

Relative humidity : 25% ~ 85%,

Atmospheric pressure : 860mbar to 1060mbar.

BASIC

Temperature : 20±3°C

Relative humidity : 60% ~ 70%,

Atmospheric pressure : 860mbar to 1060mbar

Standard Test Fixture


1.Input Power : 1.0W (2.83V)

2.Zero Level : -dB

3.Mode : SPEAKER


4.potentiometer Range : 50dB

5.Sweep Time : 0.5sec

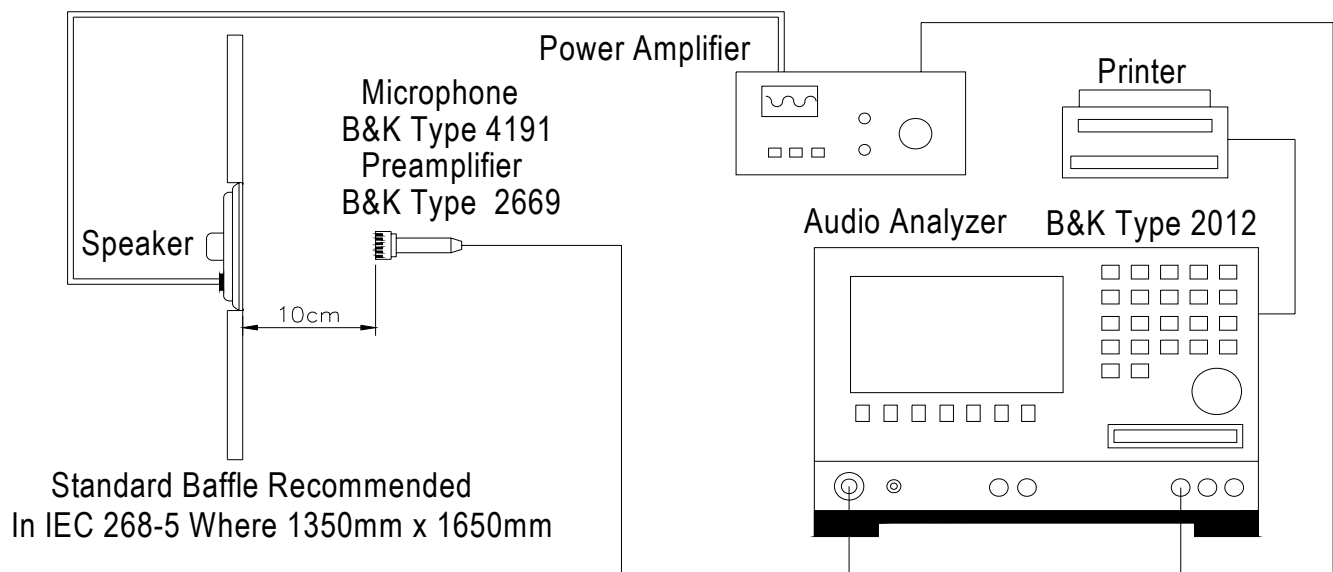

Frequency Response Curve

X:1.5000kHz *Y:102.18dB ZA:Live Curve SSR Fund.

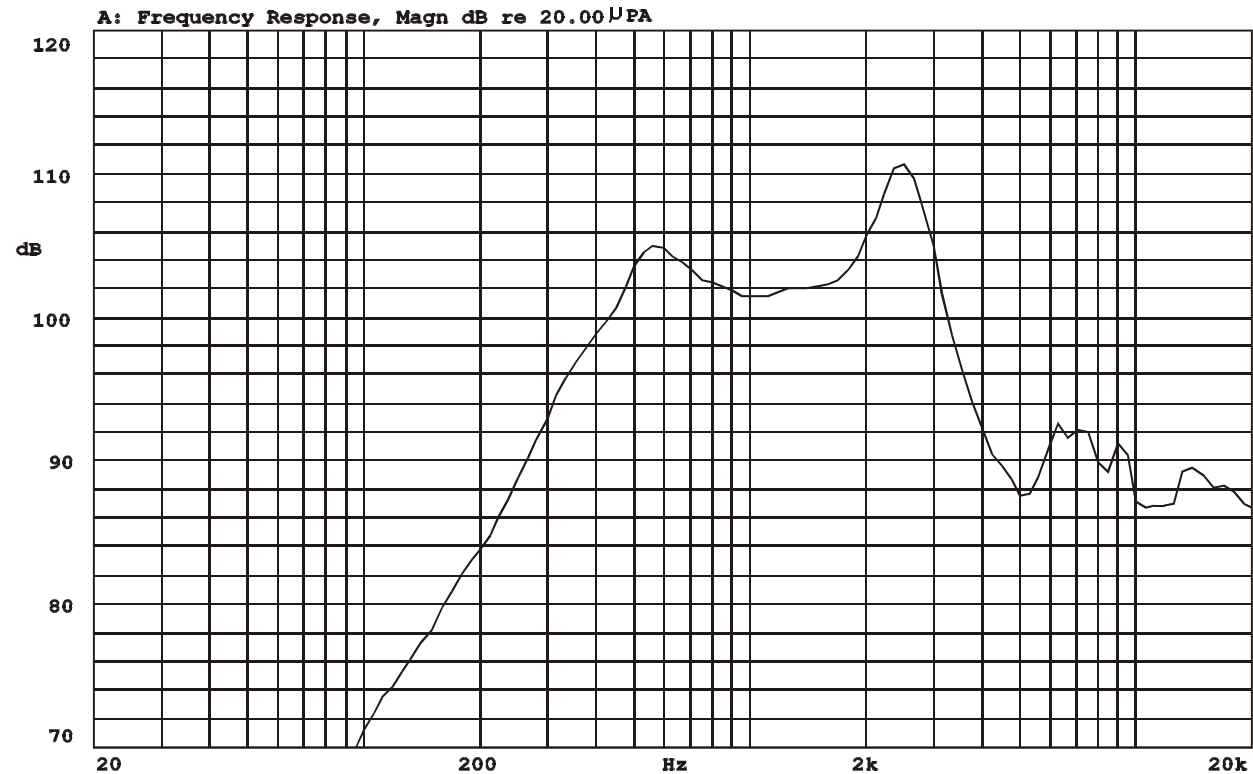


27-SEP-2006 16:45:09

Mode: SPEAKER Overload



Impedance Curve

IMPEDANCE MEASUREMENTS: Measurement of Impedance Z(jw)

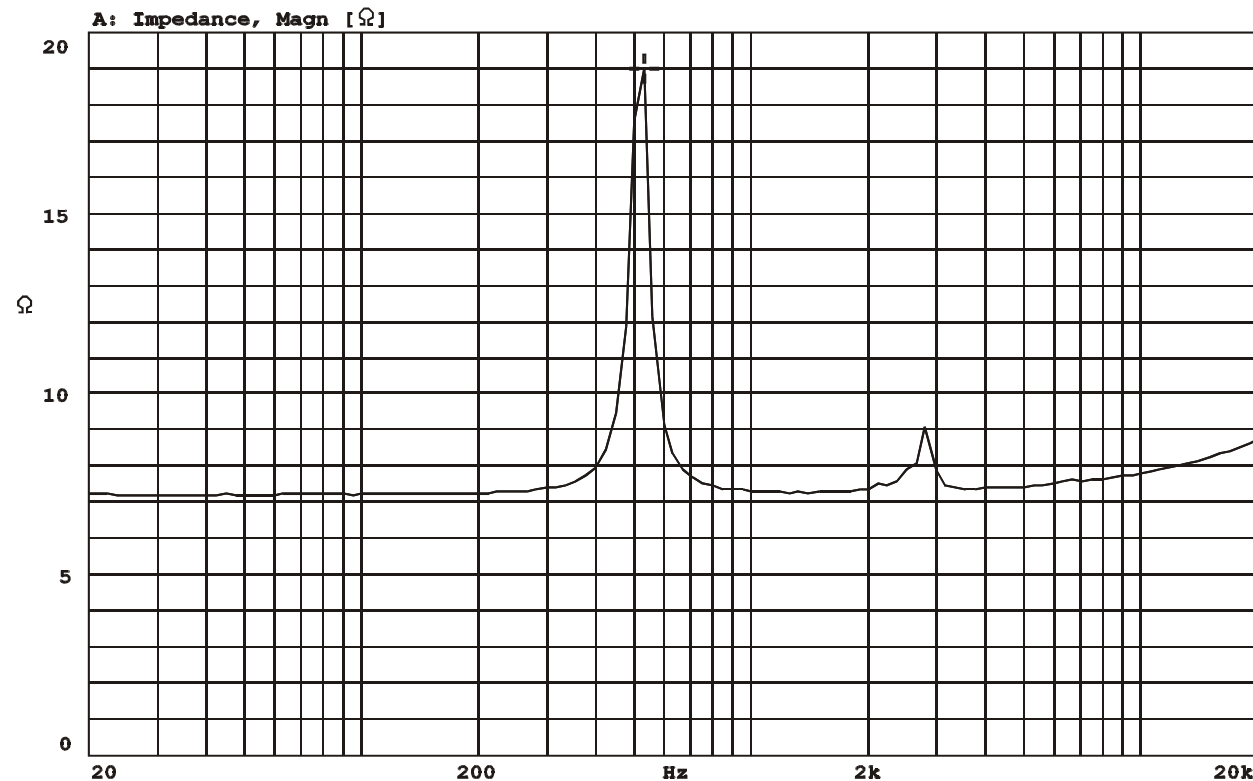


27-SEP-2006 16:58:08

Mode: Z(jw)




REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

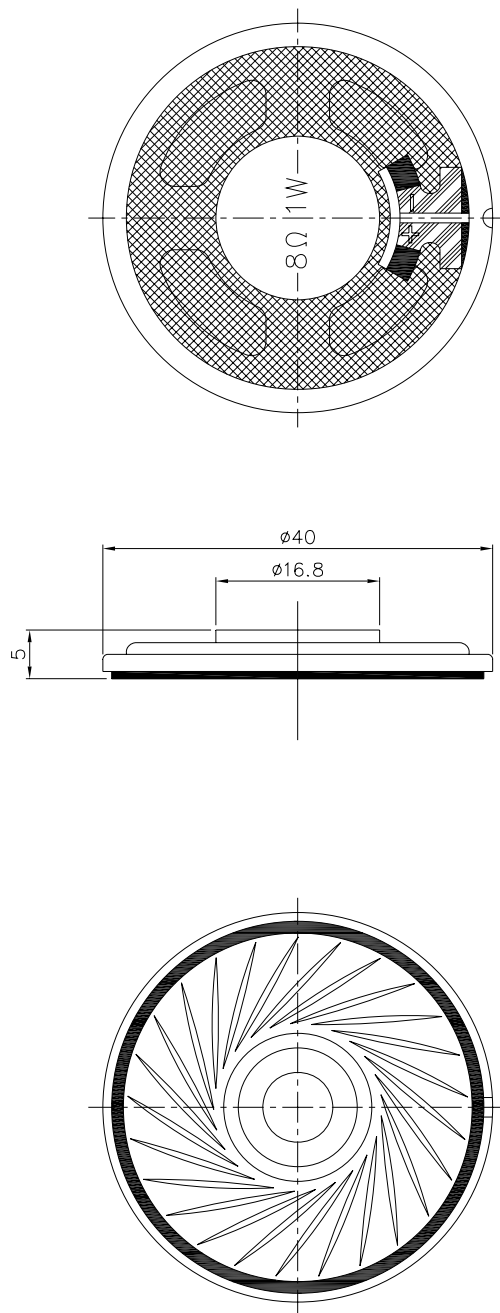

TITLE: DYNAMIC SPEAKER		DRAWN: Richard 2006/09/27	SCALE: 1:1	SHEET: 1 of 1
PART NO. AS-4050B08-B15T	1	DESIGNED: R&D DEP.	UNITS: mm	
		CHECKED:	TOLERANCE ± 0.2	
DWG NO. DSE-1078	REV	APPROVAL:	UNLESS OTHERWISE SPECIFIED:	
		MATERIAL: *****	ONE PLACE DECIMAL ± ***	
		TWO PLACE DECIMAL ± ***		
		THREE PLACE DECIMAL ± ***		

A & B Components

RELIABILITY TESTS

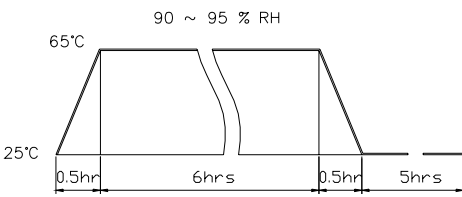Items.		Specifications
01	High temp. Test	Keep 96 hours at $+70^{\circ}\text{C} \pm 3^{\circ}\text{C}$ and leave 3 hours in normal temperature and then check
02	Low temp. Test	Keep 96 hours at $-30^{\circ}\text{C} \pm 3^{\circ}\text{C}$ and leave 3 hours in normal temperature and then check
03	Humidity test	Keep 96 hours at $+60^{\circ}\text{C} \pm 3^{\circ}\text{C}$ relative humidity 95% and leave 3 hours in normal temperature and then checked.
04	Temp./Humidity cycle	<p>The part shall be subjected 5 cycles. One cycle shall be 12 hours and consist of;</p> 
05	Thermal cycle test.	Low temperature: $-30^{\circ}\text{C} \pm 3^{\circ}\text{C}$, temperature: $+70^{\circ}\text{C} \pm 3^{\circ}\text{C}$, cycle: 1 hour/cycle each, and then keep 5 cycles in a room.
06	Vibration	10~200~10Hz sin-wave sweep 15min. 5G(constant) X,Y, Z 3 direction. 2 hours each, total 6 hours.
07	Fix drop test	Fix on jig. Then drop from 152cm height to the concrete floor X, y, z 6 direction. 5 times each, total 30 times.
08	Free drop test	Free drop from 100cm height to the concrete floor X, y, z 6 direction. 1 times each, total 6 times.
09	Rated Power test	Rated Power white noise is applied for 96 hours
10	Max Power test	Max power 1 min on – 2 min off 10 cycles.
11	Terminal strength test	Capable of withstand 1kg load for 30 seconds without resulting in any damage or rejection.
<p>Criterion:</p> <p>After these test , the change of S.P.L shall be within ± 3 dB .</p>		

SOLDERING CONDITION

Recommend using constant branding iron in 15 ~ 30W, and in temperature range 350°C .
Soldering time not over 3 seconds.