

---

# SPECIFICATION FOR APPROVAL

Product	DYNAMIC SPEAKER
Part No.	AS-3232120F08-R1T
Customer Approval	

Approved By	Checked By	Made By



A & B Components

<http://www.speaker-tw.com>

# 1. SPECIFICATION

AS-3232120F08-R1T

ITEM		SPECIFICATIONS	
01	Type	Dynamic speaker	
02	Dimension	External diameter 32X32 mm	
03	Rated Input Power	2.0 W	
04	Max. Input Power	3.0W    for 1 minute.	
05	Impedance	8 ohm ± 15% at 2K Hz	
06	Resonance Frequency (Fo)	280 Hz ± 20% at    Fo, 1V	
07	Sensitivity (S.P.L.)	78dB(0.1W/1m) ± 3 dB	at AVE 0.6K,0.8K,1.0K,1.2K (Hz).
		92dB(1W/0.1m) ± 3dB	
08	Frequency Range	Fo – 20KHz	
09	Total Harmonics Distortion	Max. 10% at 1K Hz ,1.0W.	
10	Voice Coil	Diameter 20 mm	
11	Magnet	Rare earth permanent (Nd-Fe-B) magnet Φ19x3.0mm	
12	Weight	26g ±3g	
13	Appearance	Should not exist any obstacle to be harmful to normal operation; damages, cracks, rusts and distortions, etc.	
14	Operation Test	Must be normal at program source 1.0W	
15	Buzz, Rattle, etc.	Should not be audible at 2.83V sine Wave between Fo to 20KHz	
16	Polarity	When positive voltage is applied to the terminal marked (+), diaphragm should move to the front.	
17	Terminal Strength	Capable of withstand 1kg load for 30 seconds without resulting in any damage or rejection.	
18	Temperature	Operating temperature: -20℃ to +60℃	
		Storage    temperature: -30℃ to +70℃	

## 2. MEASURING METHOD

### 2-1 .Test Condition

#### STANDARD

Temperature : 15 ~ 35℃

Relative humidity : 45% ~ 85%,

Atmospheric pressure : 860mbar to 1060mbar.

#### JUDGEMENT

Temperature : 20±3℃

Relative humidity : 60% ~ 70%,

Atmospheric pressure : 860mbar to 1060mbar

### 2-2 . Standard Test Fixture


1.Input Power : 1.0W(2.83V)

2.Zero Level : -dB

3.Mode : SPEAKER


4.potentiometer Range : 50dB

5.Sweep Time : 0.5sec

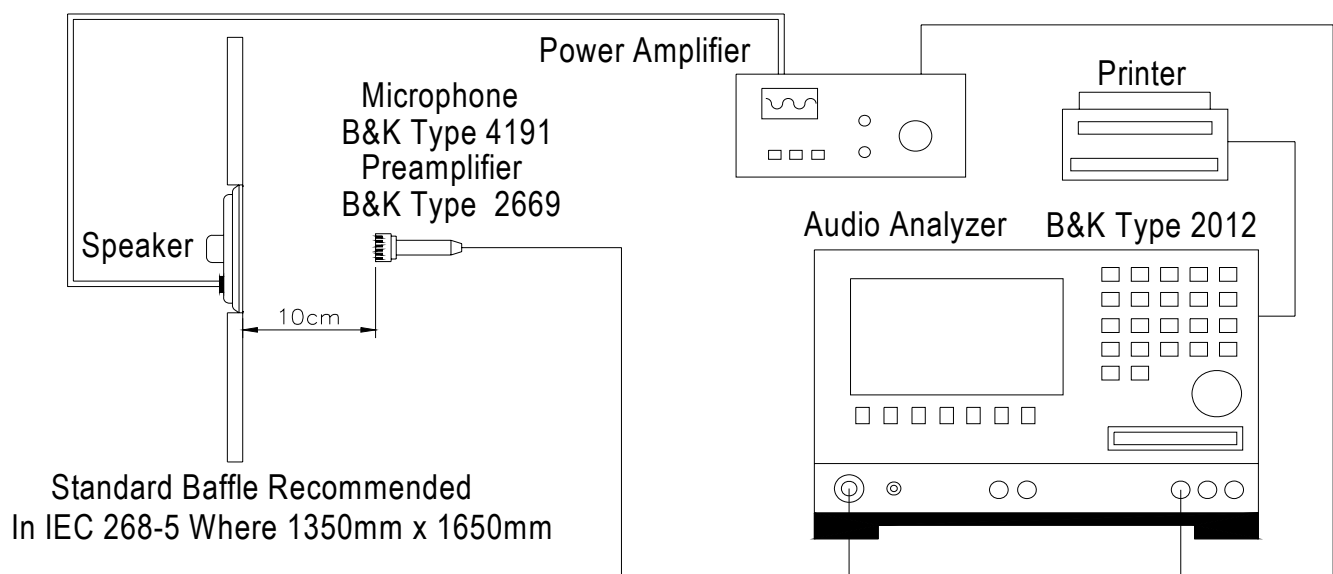

## 2-3. Frequency Response Curve

X:1.0000kHz \*Y:94.48dB ZA:Live Curve SSR Fund.

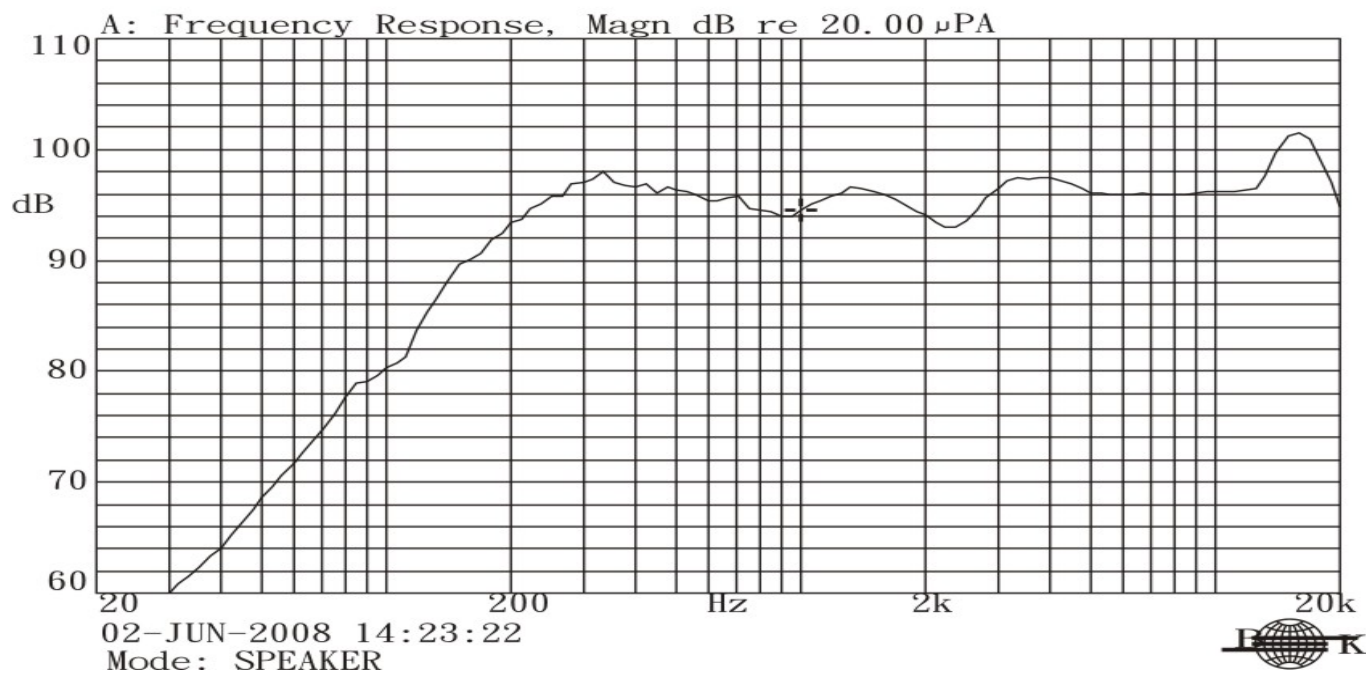


## 2-4. Impedance Curve

IMPEDANCE MEASUREMENTS: Measurement of Impedance  $Z(j\omega)$


ZA:Live Curve Impedance

X:1.0000kHz Y:7.114 $\Omega$


A: Impedance, Magn

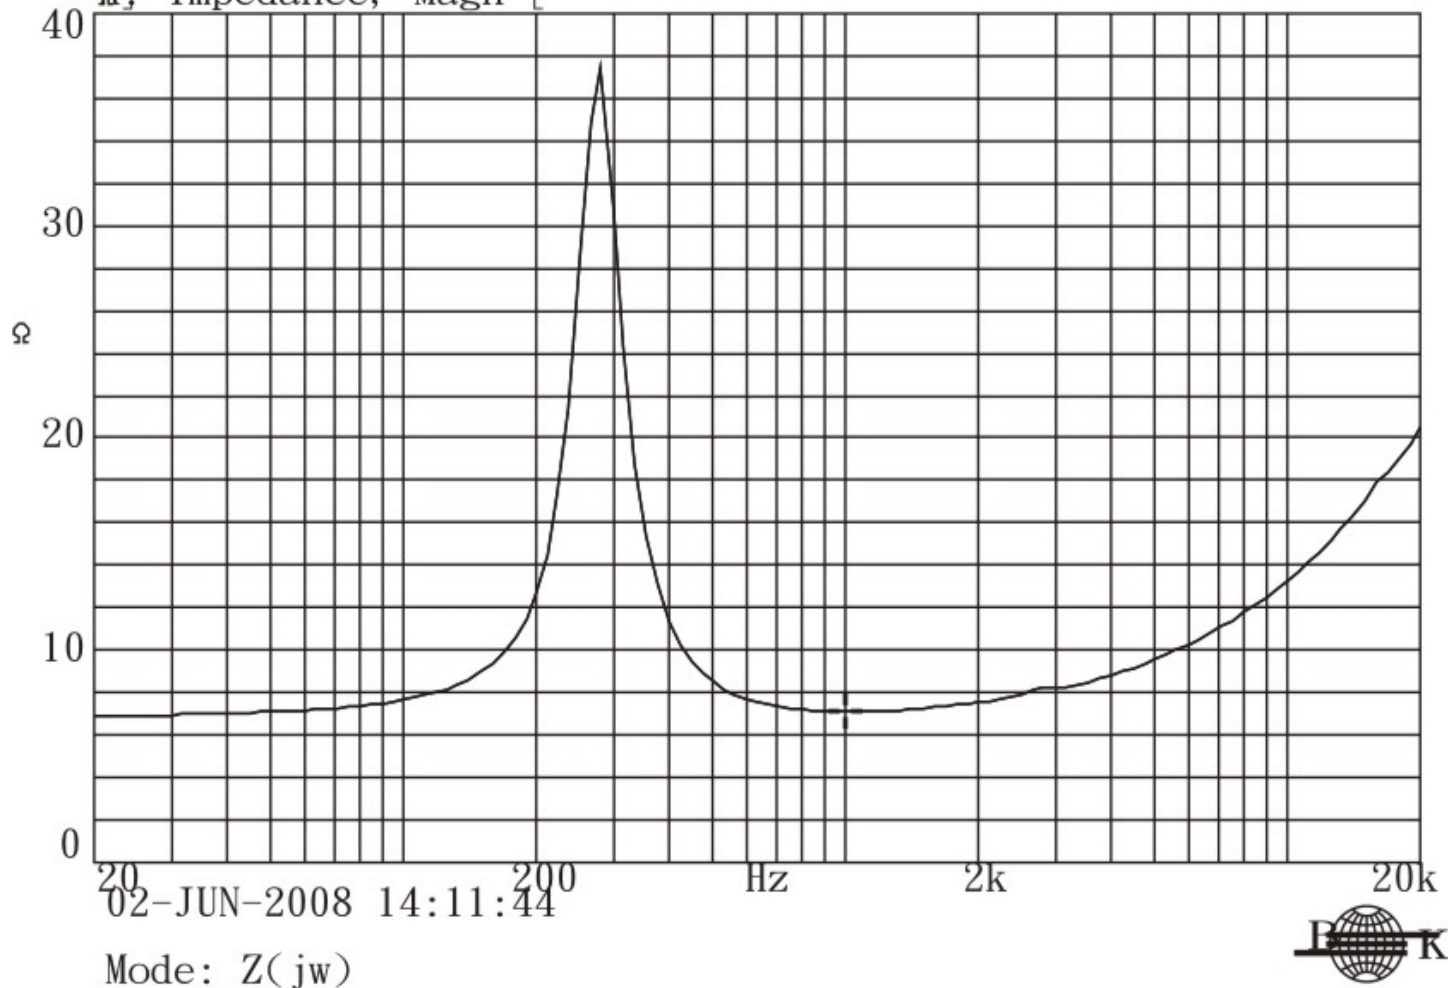

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

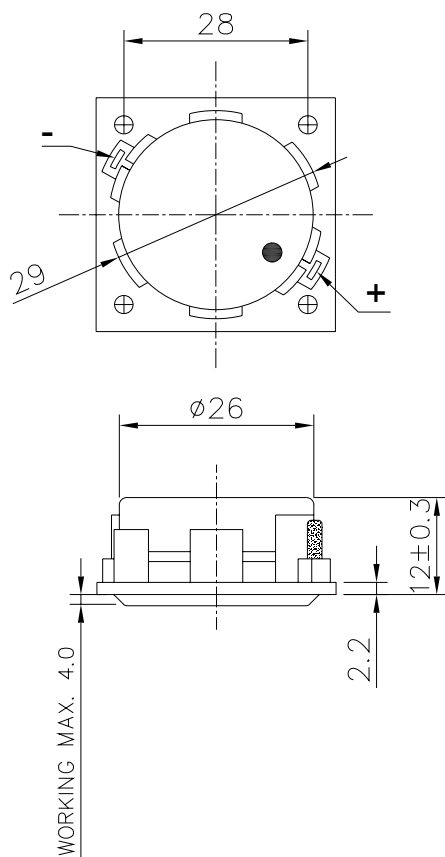


CASE : ABS  
DIAPHRAGM : SILVER FOIL

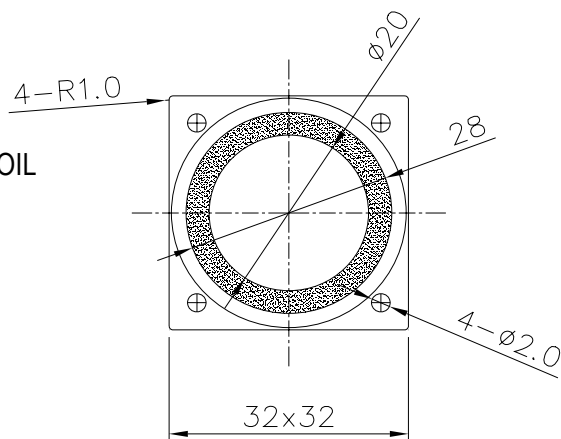

TITLE: DYNAMIC SPEAKER		DRAWN: Richard 06/03/2008	SCALE: 1: 1	SHEET: 1 of 1
PART NO. AS-3232120F08-R1T	1	DESIGNED: R & D DEP.	UNITS: mm	
		CHECKED:	TOLERANCE ± 0.2	
DWG NO. DTS-1392	REV	APPROVAL:	UNLESS OTHERWISE SPECIFIED:	
		MATERIAL: *****	ONE PLACE DECIMAL ± *** TWO PLACE DECIMAL ± *** THREE PLACE DECIMAL ± ***	

*A & B Components*

### 3. RELIABILITY TESTS

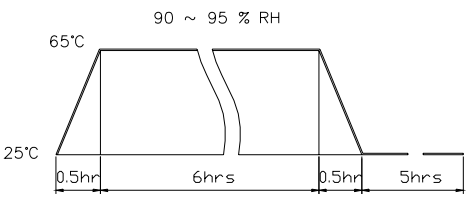Items.		Specifications
01	High temp. Test	Keep 96 hours at $+70^{\circ}\text{C} \pm 3^{\circ}\text{C}$ and leave 3 hours in normal temperature and then check
02	Low temp. Test	Keep 96 hours at $-30^{\circ}\text{C} \pm 3^{\circ}\text{C}$ and leave 3 hours in normal temperature and then check
03	Humidity test	Keep 96 hours at $+60^{\circ}\text{C} \pm 3^{\circ}\text{C}$ relative humidity 95% and leave 3 hours in normal temperature and then checked.
04	Temp./Humidity cycle	<p>The part shall be subjected 5 cycles. One cycle shall be 12 hours and consist of;</p> 
05	Thermal cycle test.	Low temperature: $-30^{\circ}\text{C} \pm 3^{\circ}\text{C}$ , temperature: $+70^{\circ}\text{C} \pm 3^{\circ}\text{C}$ , cycle: 1 hour/cycle each, and then keep 5 cycles in a room.
06	Vibration	10~200~10Hz sin-wave sweep 15min. 5G(constant) X,Y, Z 3 direction. 2 hours each, total 6 hours.
07	Fix drop test	Fix on jig. Then drop from 152cm height to the concrete floor X,y, z 6 direction. 5 times each, total 30 times.
08	Free drop test	Free drop from 100cm height to the concrete floor X,y, z 6 direction. 1 times each, total 6 times.
09	Load test	Rated Power white noise is applied for 96 hours
10	Max Power test	Max power 1 min on – 2 min off 10 cycles.
11	Terminal strength test	Capable of withstand 1kg load for 30 seconds without resulting in any damage or rejection.
<p>CRITERION :</p> <p>After these test , the change of S.P.L shall be within <math>\pm 3</math> dB .</p>		

### SOLDERING CONDITION

Recommend using constant branding iron in 30W, and in temperature range  $320 \pm 10^{\circ}\text{C}$ .

Soldering time 2 seconds.